

M602BA-UL

Sunrise Series -- 3528 SMD LED Module

Available in ● ○ ○ ○



Product Features

The M602BA is powered by an Epistar 3528 SMD LED chip, designed to produce high luminous efficacy. Built with overmolded housing and aluminum PCB, the M602BA was designed to last. Printed markings allow individual modules to be cut, while double-sided 3M adhesive tape found on the back of modules allows for easy installation.



Product Specifications

	Model No.	M602BA-UL
Physical	Color	White
	Dimensions (length x width x height)	1.8" x 0.28" x 0.18"
	Color Temperature	6000K
	LED Chips / Module	2
	LED Modules / Foot	5
	LED Modules / String	50
	Operating Temperature	-13 ~ 140 °F
	Storage Temperature	-13 ~ 158 °F
	View Angle	115°
Electrical	Power Consumption	0.3 W
	Foward Voltage	12V
	Forward Current	25 mA
Output	Lumens / Module	16
	Lumens / Foot	80
Safety	Certification	UL, CE, RoHS
	Ingress Grade	IP65
	Warranty	3 years or 13,000 hours

Color Variations


		Warm White	Cold White	Red
Physical	Color Temperature	3000K	9000K	620-625K
	CRI	75	75	
Electrical	Lumens / Module	16	16	6
	Lumens / Foot	80	80	30

Product Dimensions

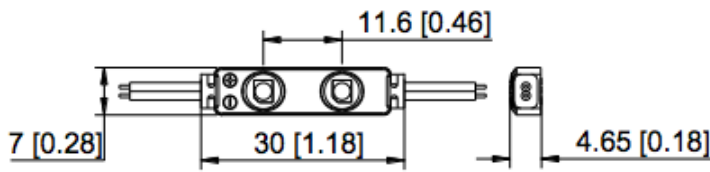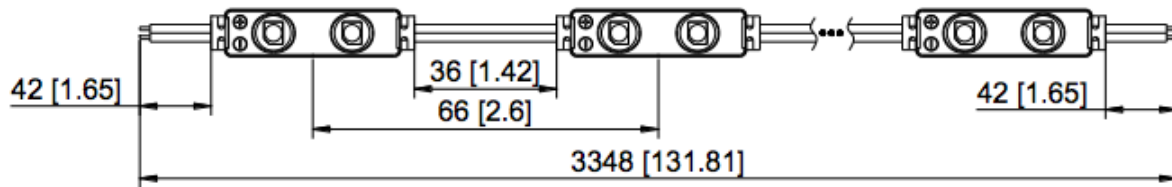


Units: mm [in]

Light Distribution




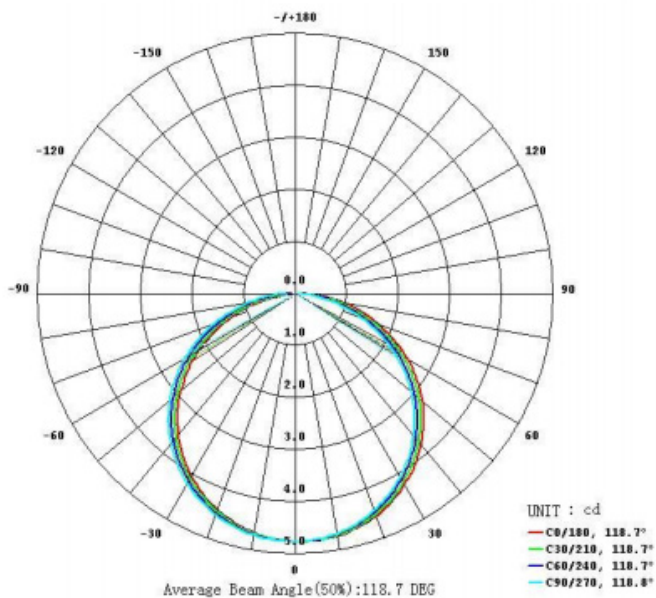


Packaging Information

50 modules per string

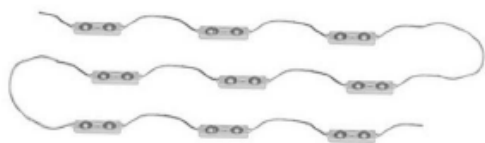

1 string per plate

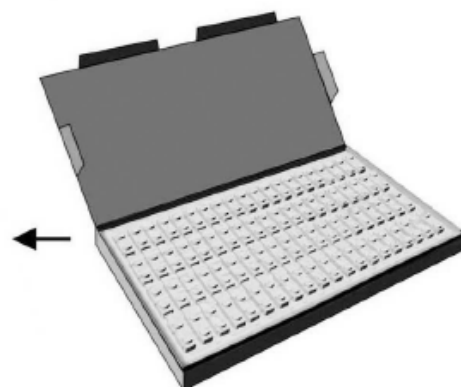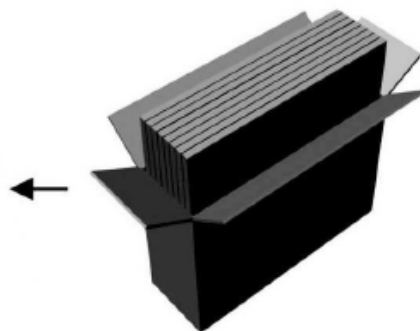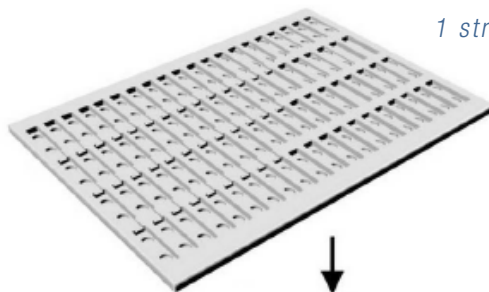

10 cartons per package

1 plate per carton

Packaging Dimensions (subject to change without prior notice)

Weight (per module)	1.5 g	0.003 lb
Package Dimensions (length x width x height)	21.85" x 8.66" x 8.50"	
Net Weight	3.52 lb	
Gross Weight	9.48 lb	