

# M902AA-UL

Sunrise Series -- 5050 SMD LED Module

Available in ● ○



## Product Features

The M902AA is powered by an Epistar 5050 SMD LED chip, designed to produce high luminous efficacy. Built with overmolded housing and aluminum PCB, the M902AA was designed to last. Printed markings allow individual modules to be cut, while double-sided 3M adhesive tape found on the back of modules allows for easy installation.



## Product Specifications

	Model No.	M902AA-UL
Physical	Color	White
	Dimensions (length x width x height)	2.56" x 0.71" x 0.34"
	Color Temperature	6000K
	LED Chips / Module	2
	LED Modules / Foot	2
	LED Modules / String	20
	Operating Temperature	-13 ~ 140 °F
	Storage Temperature	-13 ~ 158 °F
	View Angle	150°
Electrical	Power Consumption	0.48 W
	Forward Voltage	12V
	Forward Current	100 mA
Output	Lumens / Module	41
	Lumens / Foot	82
Safety	Certification	UL, CE, RoHS
	Ingress Grade	IP65
	Warranty	4 years or 18,000 hours


## Color Variations

		Red
Physical	Color Temperature	620-625K
	CRI	
Electrical	Lumens / Module	10
	Lumens / Foot	20

## Product Dimensions

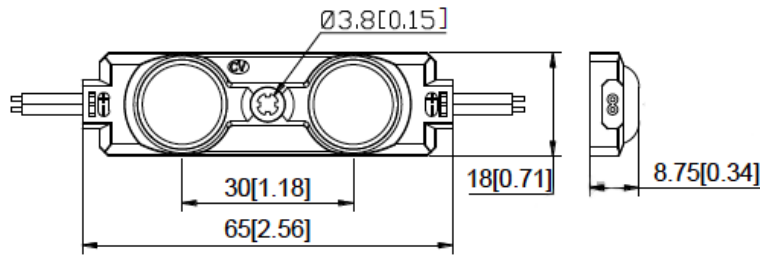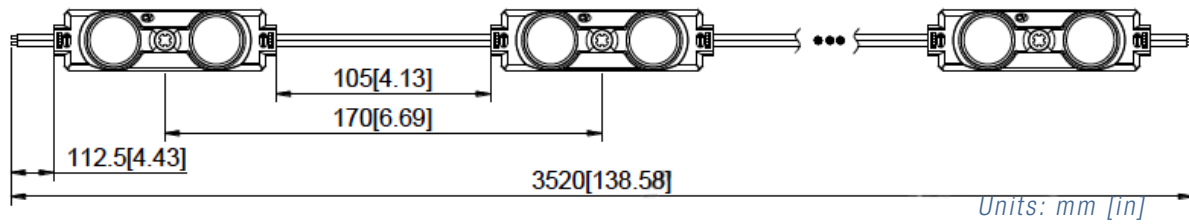


## Light Distribution




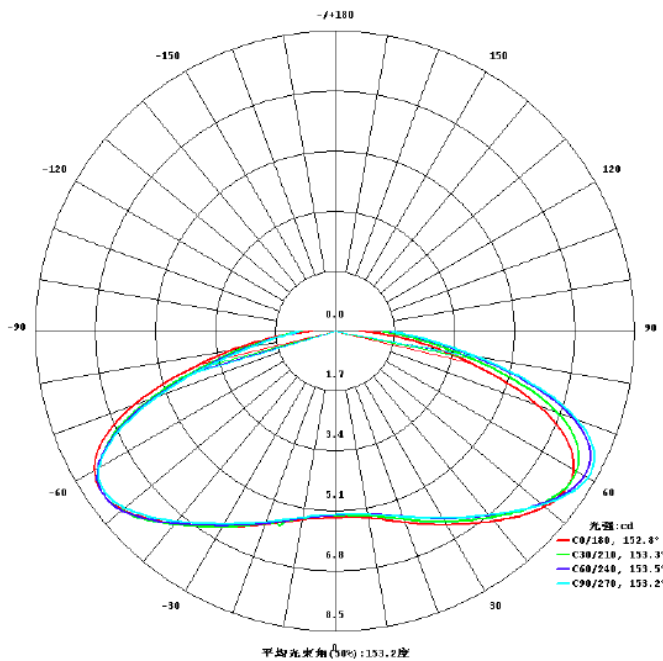


## Packaging Information

20 modules per string

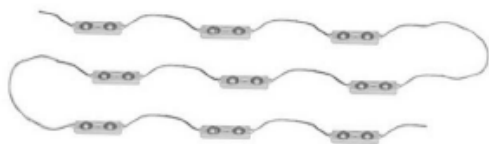

5 strings per plate

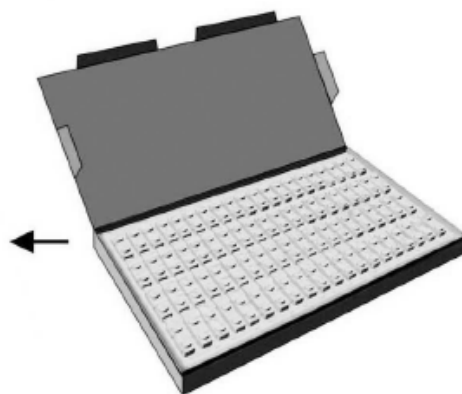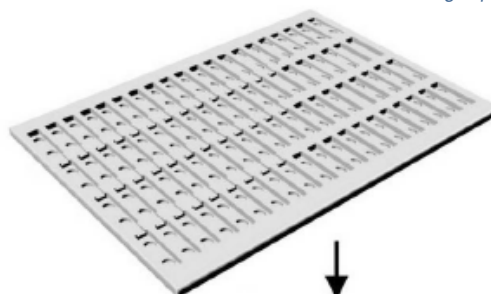

8 cartons per package

1 plate per carton

## Packaging Dimensions ( subject to change without prior notice )

Weight (per module)	11.2 g	0.024 lb
Package Dimensions (length x width x height)	22.6" x 9.84" x 18.89"	
Net Weight	19.4 lb	
Gross Weight	29.98 lb	